

TENCATE Toptex®



502988 | 01.2013

12 Vliesnägel / Montageset zur Fixierung eines TopTex® Heu- oder Strohschutzvlieses 12 protection fabric pins / assembly kit to fix TopTex® Hay or Straw protection fabric

Attention! Please obey the installation guidelines!

Installation guidelines:

Use 12 protection fabric pins to fix a straw cover 9,8 by 12,5 m. Clamp the fabric with a pin every 3 to 4 m according to requirements and make sure it is tightened properly. Additional fastening can become necessary if exposed to strong wind.


Apply more pins with larger fabric dimensions.

Storage of dry, storable straw and hay only. No liability is assumed in case of non-compliance with the installation instructions or improper stacking. Failure to understand or comply with the instructions of use may result in mold formation, wetting, rotting etc. of the stored material, making it unfit for use.

In case of intense rain (by definition of "Deutscher Wetterdienst DWD") heavy wetting may appear. After such cases the drying effect may be restrained or even debarred.


Please follow the essential installation guidelines:

- Orientate stack and fabric into principal wind direction
- Cover with a "roof" sloping by min. 45° - Max. pile width 5 m
- Tighten the fabric firmly, fix with protection fabric pins
- Not below trees! (Danger of heavy precipitation caused by wind)

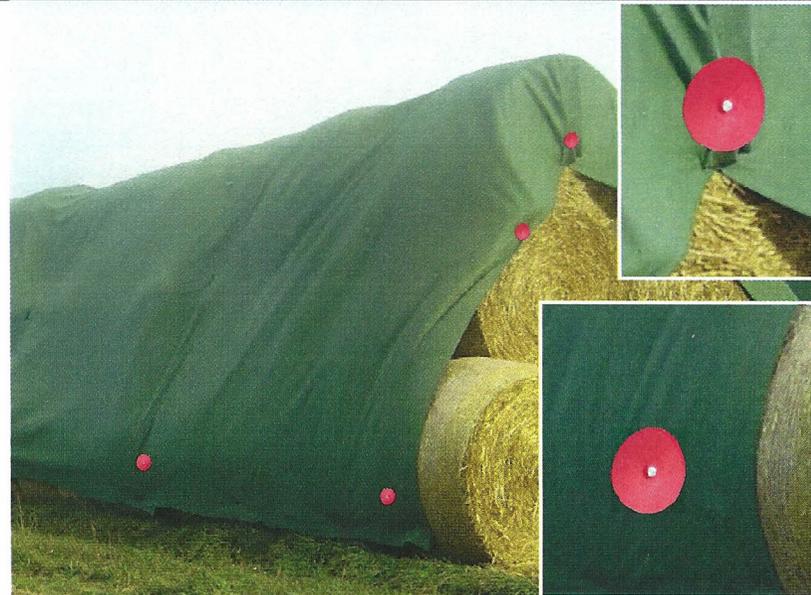

TENCATE GEOSYNTHETICS AUSTRIA GMBH
Schachermayerstr. 18, A-4021 Linz, Austria
www.tencategeosynthetics.com

EN The information given in this brochure is to the best of our knowledge true and correct, however new research results and practical experience can make revisions necessary. No guarantee or liability can be drawn from the information mentioned herein. Furthermore, it is not our intention to violate any patents or licences. All pictures shown are symbolic and do not represent a general recommendation of use.

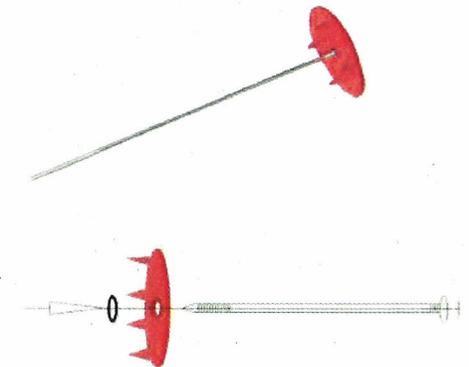

TENCATE
materials that make a difference